


# PETITE CRYSTAL 1562- \_\_ \_\_ 0







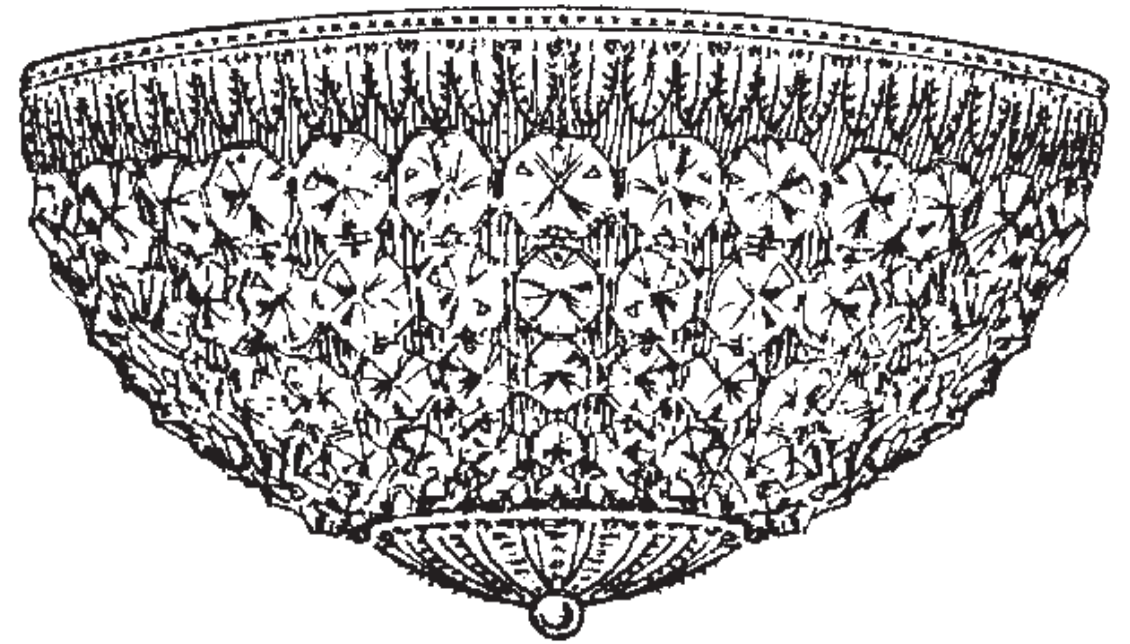





 **SCHONBEK** | 1870


**T**HIS DESIGN IS THE PROPRIETARY  
TRADE DRESS/TRADEMARK OF  
W SCHONBEK LLC.

5 Lights  
Diameter: 12"  
Body Length: 6-1/2"  
Hanging Weight: 4 lbs.

 **SCHONBEK** | 1870

								
MAX 40 W	110-120 V							



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

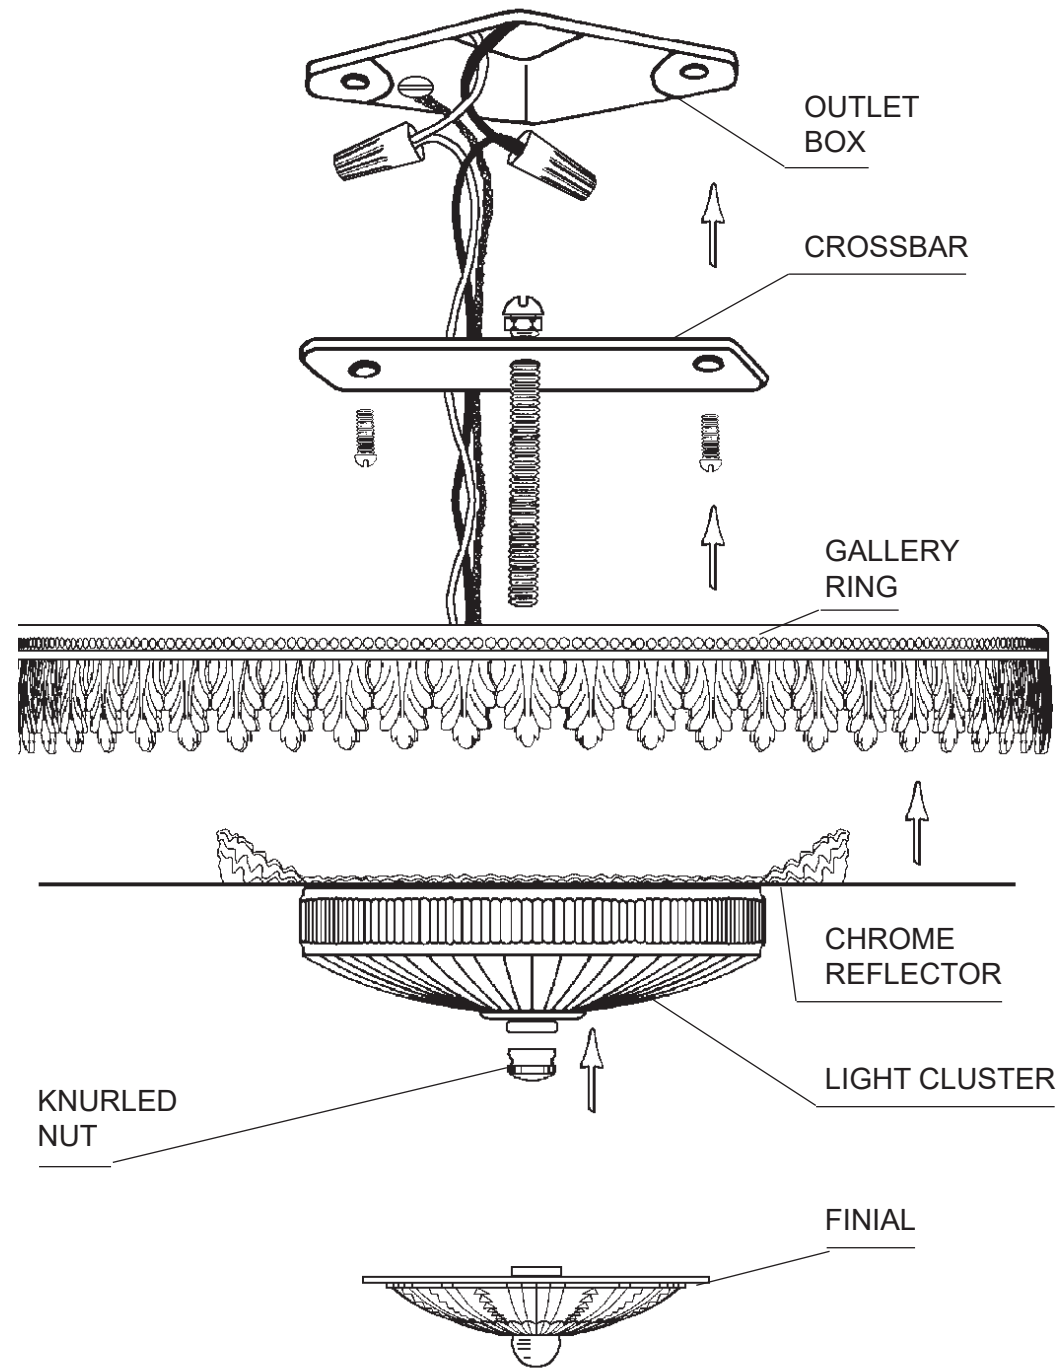


**1** Remove crossbar from light cluster and reflector. Attach to outlet box in ceiling.

**2** Place gallery ring over chrome reflector and light cluster. Connect fixture ground wire to grounding screw in outlet box and complete connections of fixture conductors to main power leads. Fixture MUST be grounded.

**3** Slide assembled parts - gallery ring together with chrome reflector (insulation pad above) and light cluster over thread attached to crossbar and secure with knurled nut. Make sure entire assembly is firmly against the ceiling. If the outlet box is not flush with ceiling, it may be necessary to adjust the thread attached to crossbar. Install bulbs and test power to insure proper wiring before hanging trim from fixture.

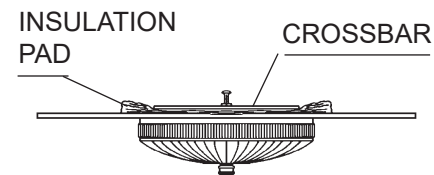






4

You will need 5 - G16-1/2  
25 Watts Recommended  
40 Watts Max  
MIN 90°C SUPPLY  
CONDUCTORS

Install bulbs and be sure  
to test fixture BEFORE  
trimming.

GALLERY  
RING

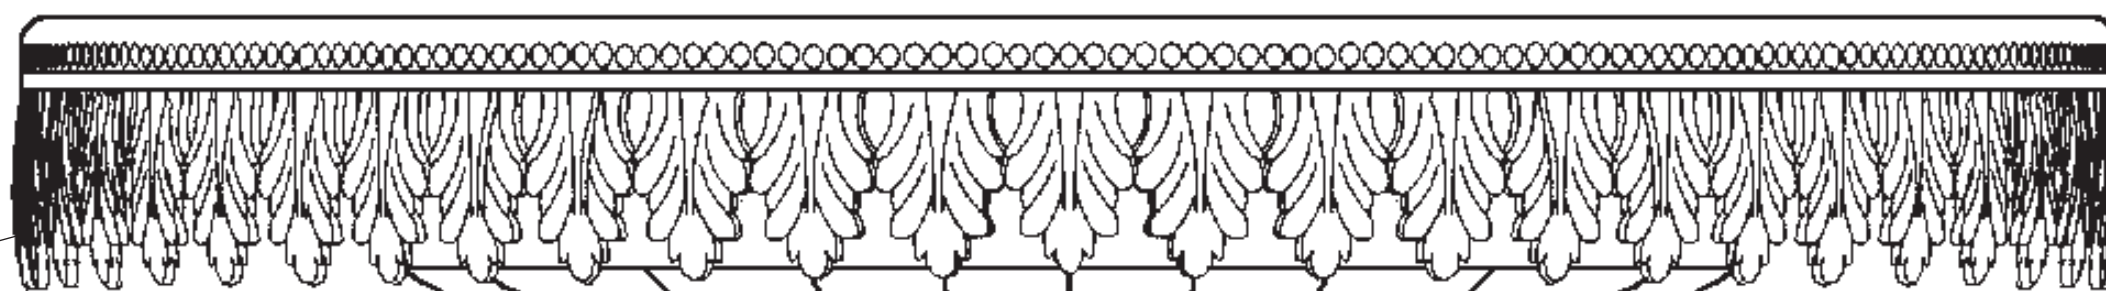


LARGE JEWEL  
UPPER END

5 Hang all Crystal Chains "A" from every other  
hole in the gallery ring so that the metal  
accessories face outwards and so that the large  
jewels are on the upper end. Hook other end  
with small jewels into finial.

A

5


SMALL JEWEL  
LOWER END

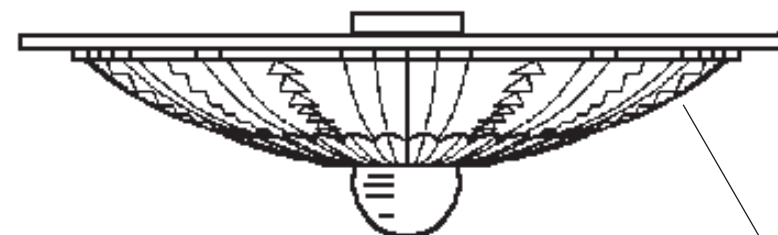

FINIAL



# PETITE CRYSTAL 1562- \_\_ \_\_ R

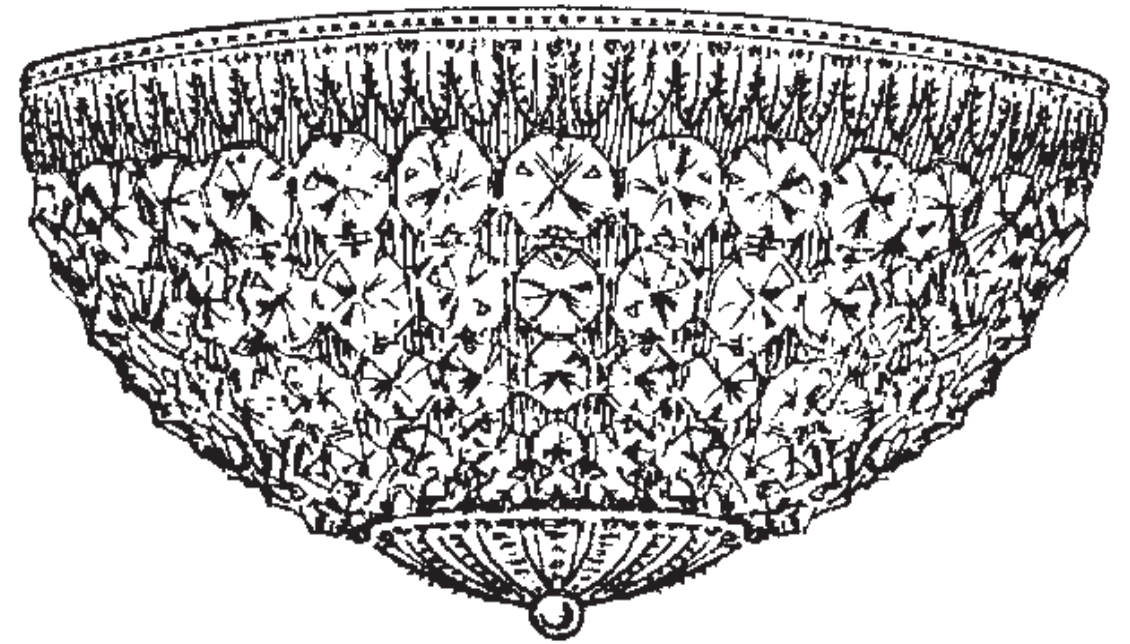











**T**HIS DESIGN IS THE PROPRIETARY TRADE DRESS/TRADEMARK OF W SCHONBEK LLC.


5 Lights  
Diameter: 12"  
Body Length: 6-1/2"  
Hanging Weight: 4 lbs.

 **SCHONBEK** | 1870

 **SCHONBEK** | 1870

								
MAX 40 W		110-120 V						



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

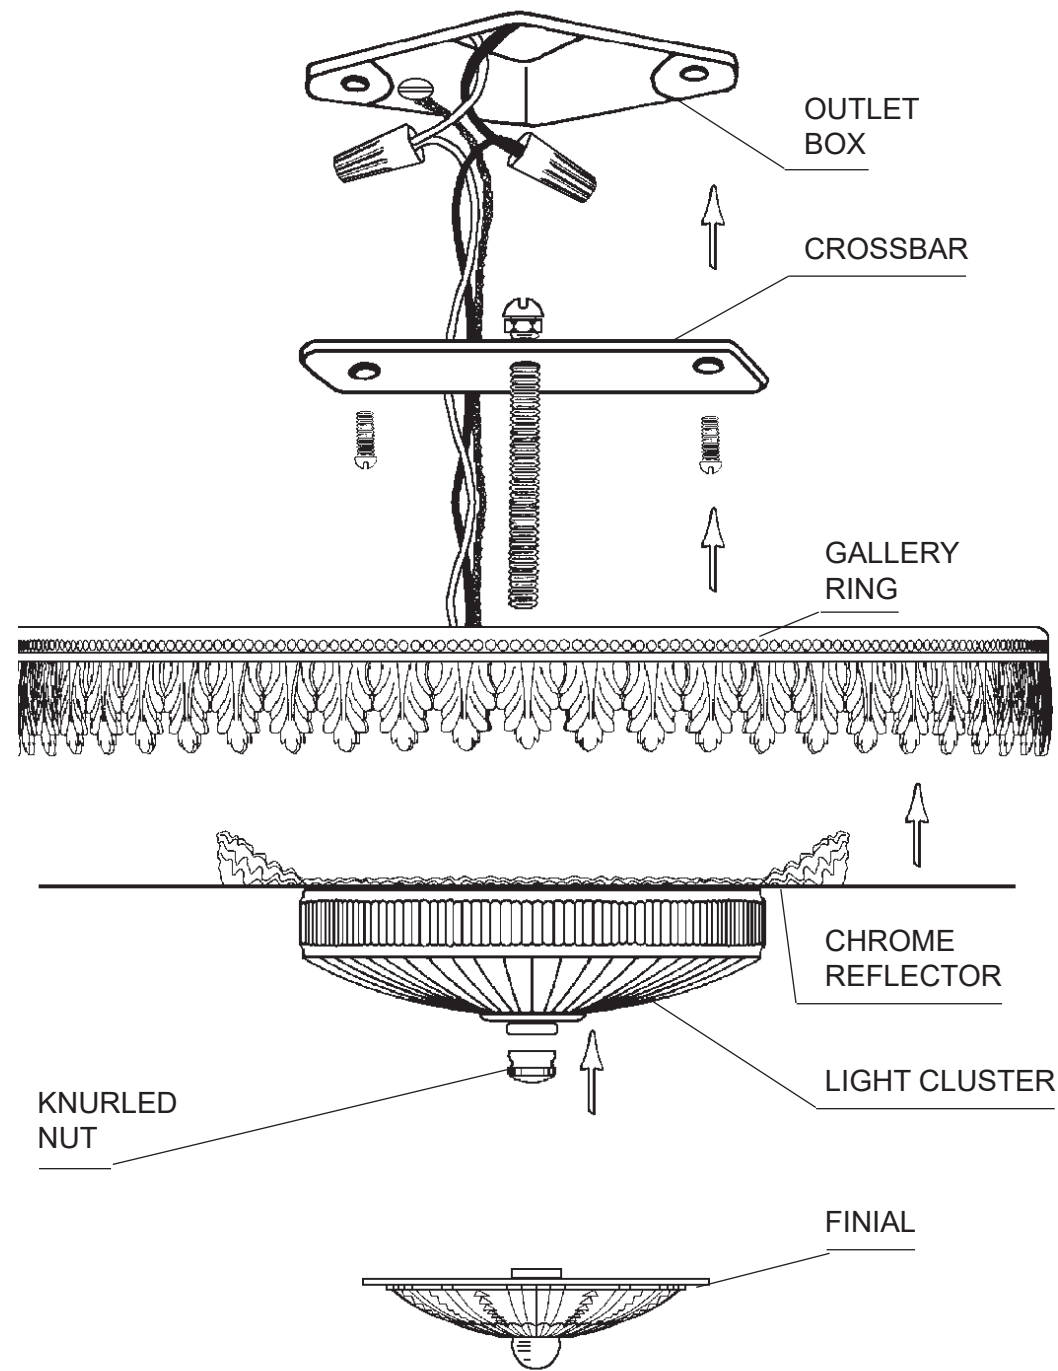



**1** Remove crossbar from light cluster and reflector. Attach to outlet box in ceiling.

**2** Place gallery ring over chrome reflector and light cluster. Connect fixture ground wire to grounding screw in outlet box and complete connections of fixture conductors to main power leads. Fixture MUST be grounded.

**3** Slide assembled parts - gallery ring together with chrome reflector (insulation pad above) and light cluster over thread attached to crossbar and secure with knurled nut. Make sure entire assembly is firmly against the ceiling. If the outlet box is not flush with ceiling, it may be necessary to adjust the thread attached to crossbar. Install bulbs and test power to insure proper wiring before hanging trim from fixture.

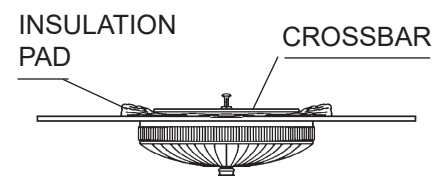






4

You will need 5 - G16-1/2  
25 Watts Recommended  
40 Watts Max  
MIN 90°C SUPPLY  
CONDUCTORS

Install bulbs and be sure  
to test fixture BEFORE  
trimming.

GALLERY  
RING

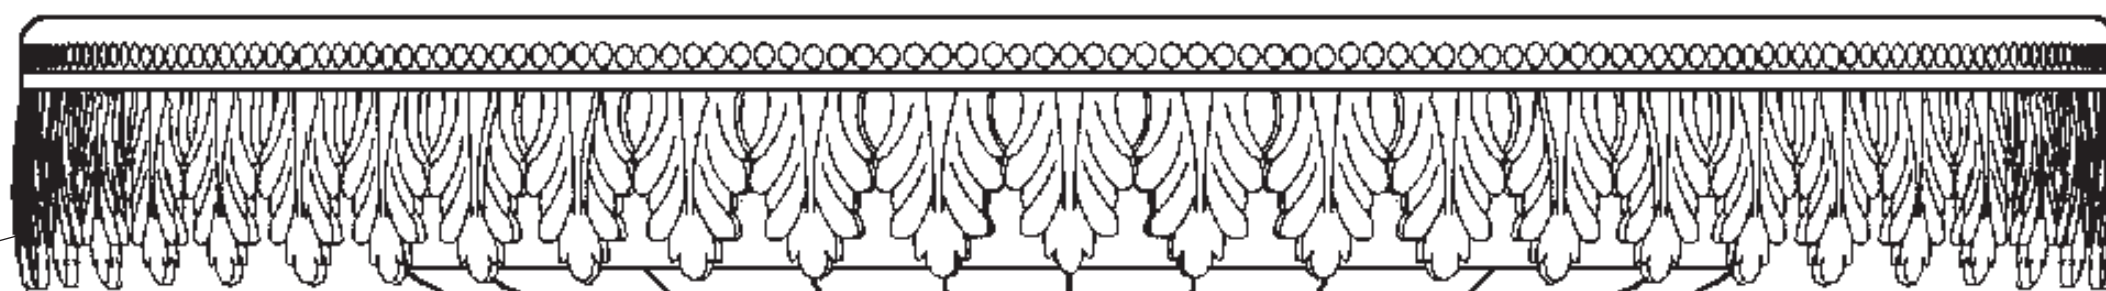


LARGE JEWEL  
UPPER END

5 Hang all Crystal Chains "A" from every other  
hole in the gallery ring so that the metal  
accessories face outwards and so that the large  
jewels are on the upper end. Hook other end  
with small jewels into finial.

A

5

SMALL JEWEL  
LOWER END

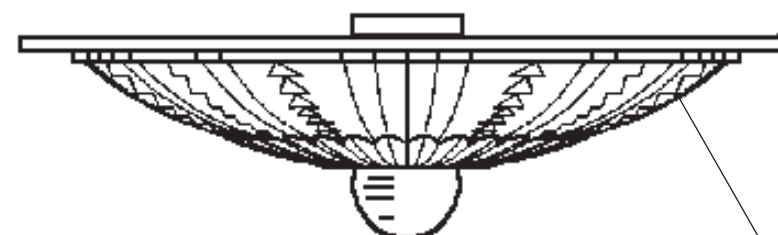


FINIAL





# PETITE CRYSTAL 1562-\_\_\_S

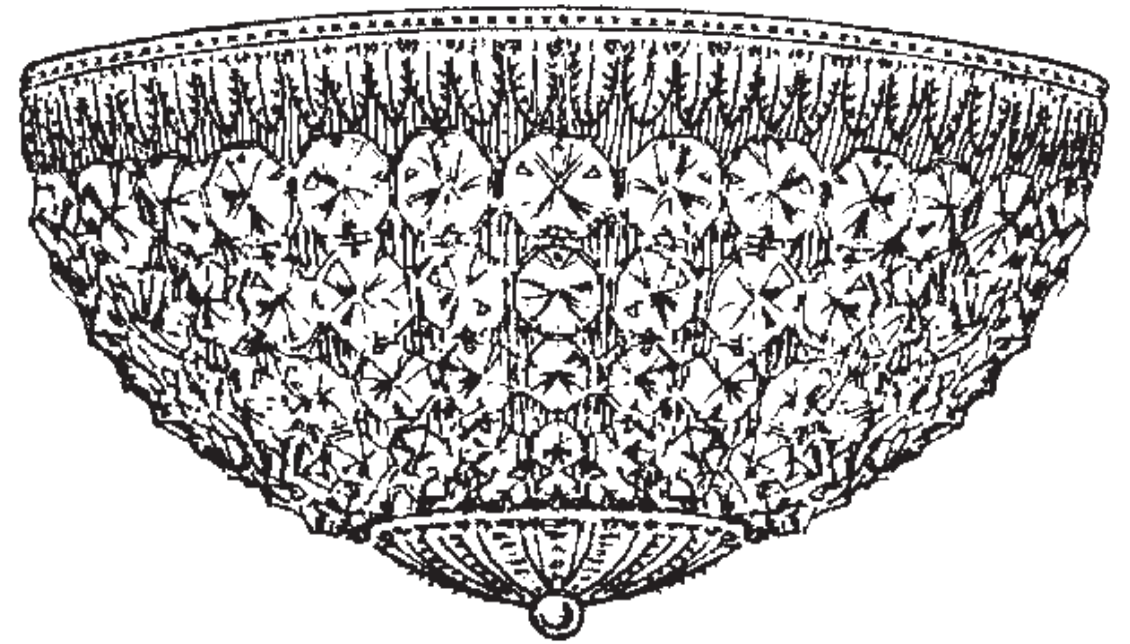











 **SCHONBEK** | 1870


**T**HIS DESIGN IS THE PROPRIETARY  
TRADE DRESS/TRADEMARK OF  
W SCHONBEK LLC.

5 Lights  
Diameter: 12"  
Body Length: 6-1/2"  
Hanging Weight: 4 lbs.

 **SCHONBEK** | 1870

								
MAX 40 W		110-120 V						



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

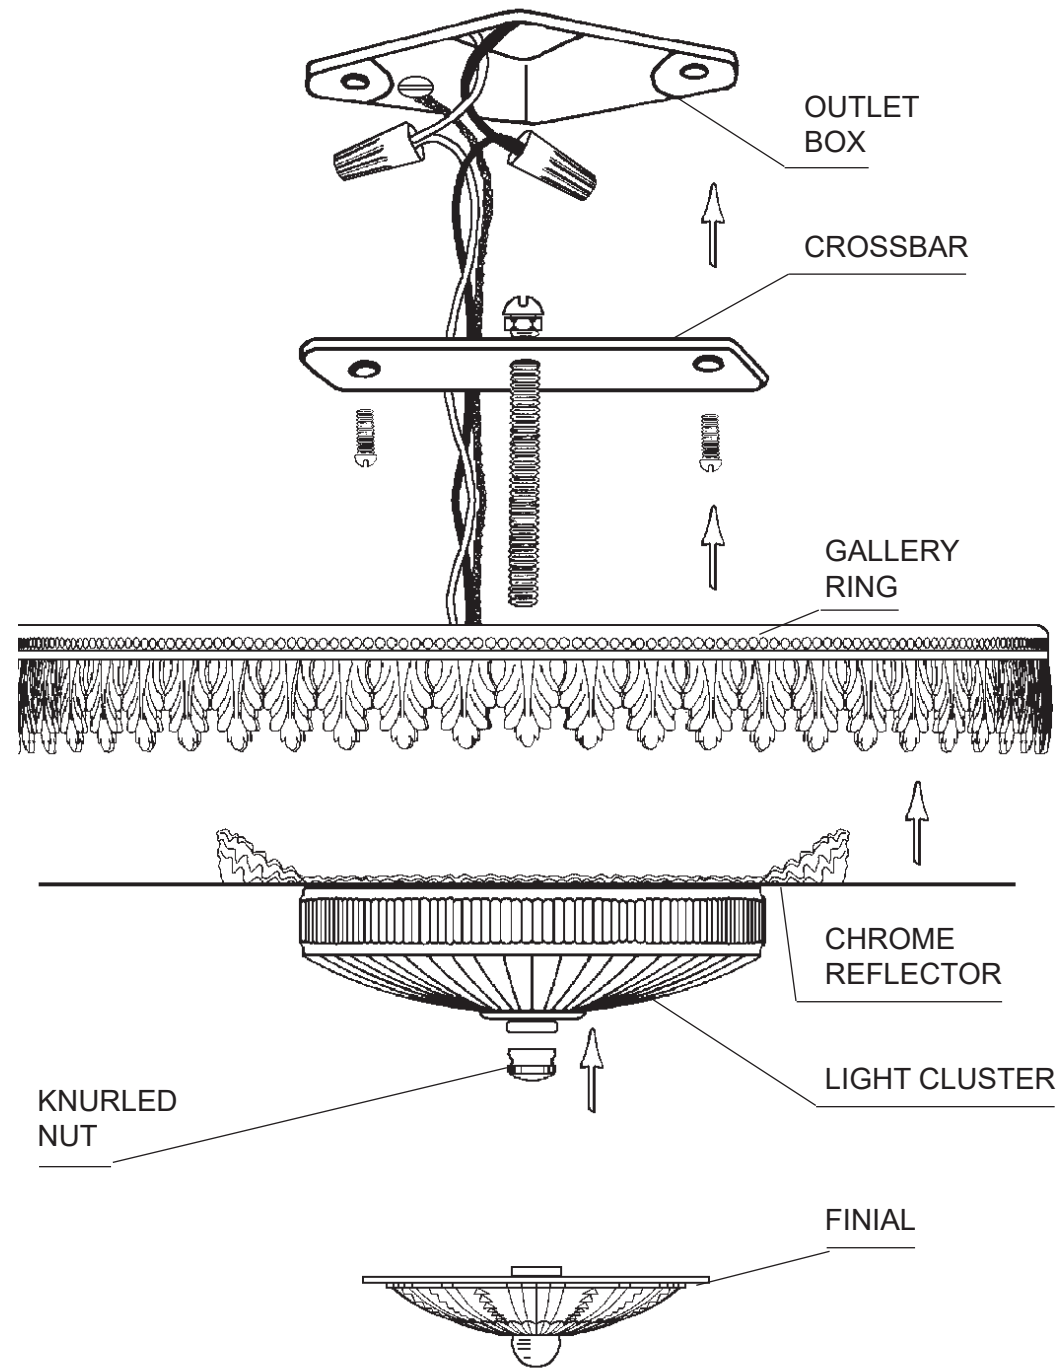


**1** Remove crossbar from light cluster and reflector. Attach to outlet box in ceiling.

**2** Place gallery ring over chrome reflector and light cluster. Connect fixture ground wire to grounding screw in outlet box and complete connections of fixture conductors to main power leads. Fixture MUST be grounded.

**3** Slide assembled parts - gallery ring together with chrome reflector (insulation pad above) and light cluster over thread attached to crossbar and secure with knurled nut. Make sure entire assembly is firmly against the ceiling. If the outlet box is not flush with ceiling, it may be necessary to adjust the thread attached to crossbar. Install bulbs and test power to insure proper wiring before hanging trim from fixture.

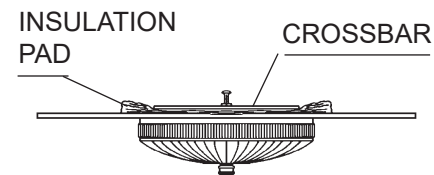






4

You will need 5 - G16-1/2  
25 Watts Recommended  
40 Watts Max  
MIN 90°C SUPPLY  
CONDUCTORS

Install bulbs and be sure  
to test fixture BEFORE  
trimming.

GALLERY  
RING

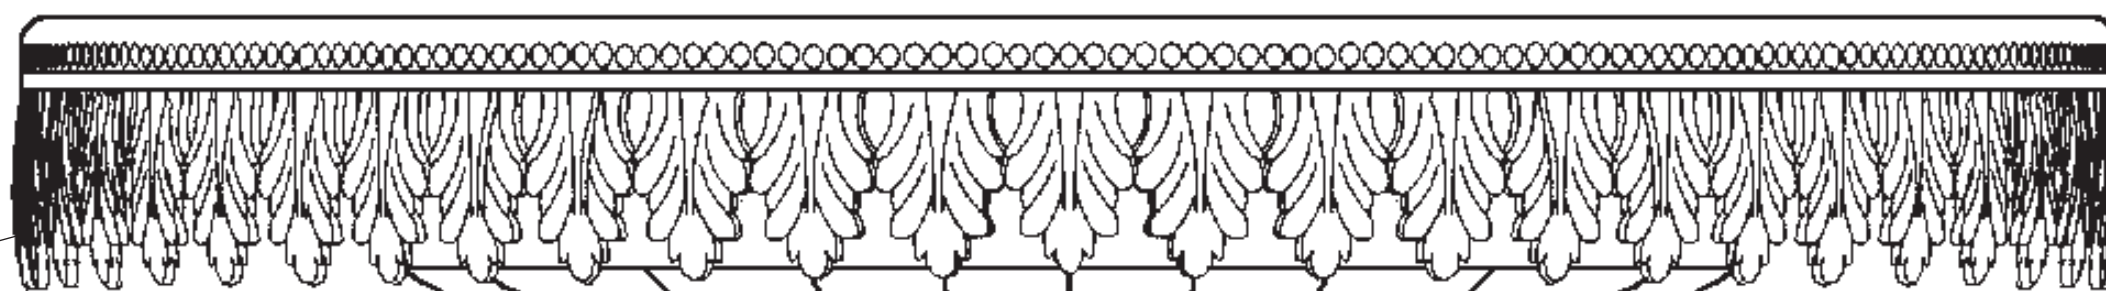


LARGE JEWEL  
UPPER END

5 Hang all Crystal Chains "A" from every other  
hole in the gallery ring so that the metal  
accessories face outwards and so that the large  
jewels are on the upper end. Hook other end  
with small jewels into finial.

A

5


SMALL JEWEL  
LOWER END

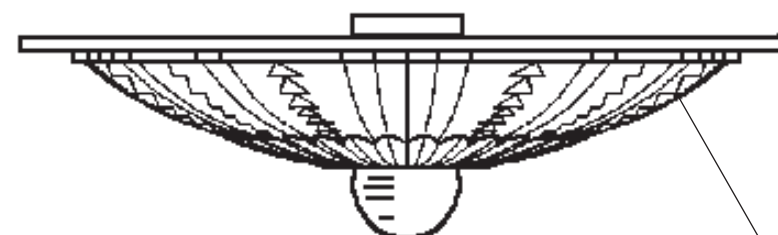

FINIAL



# PETITE CRYSTAL 1562-\_\_\_S

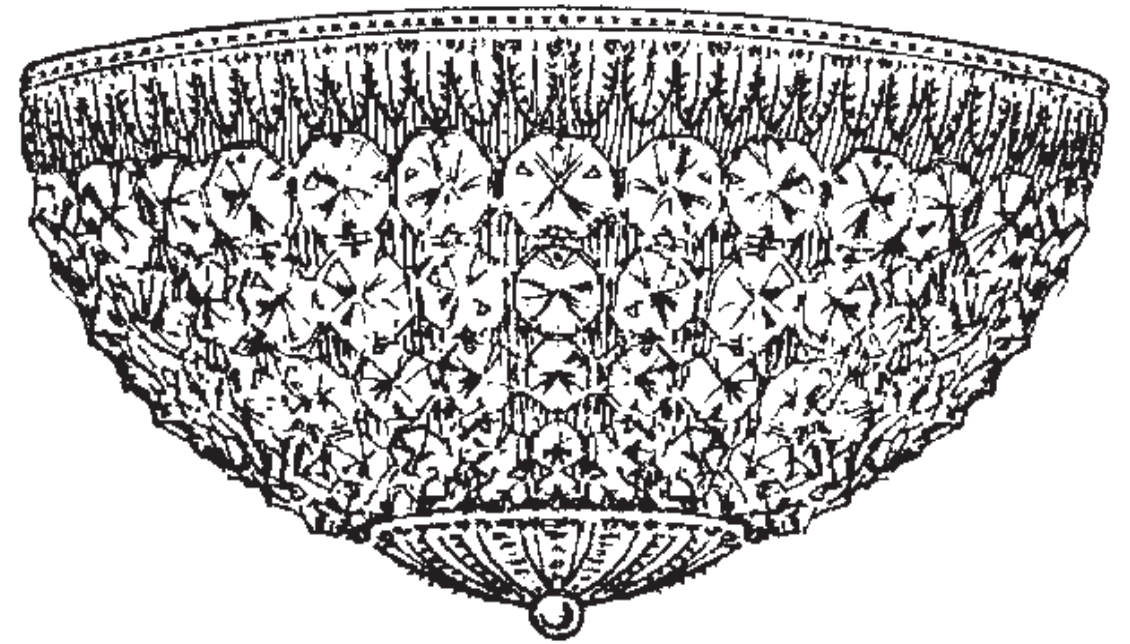











 **SCHONBEK** | 1870


**T**HIS DESIGN IS THE PROPRIETARY  
TRADE DRESS/TRADEMARK OF  
W SCHONBEK LLC.

5 Lights  
Diameter: 12"  
Body Length: 6-1/2"  
Hanging Weight: 4 lbs.

 **SCHONBEK** | 1870

								
MAX 40 W	110-120 V							



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.


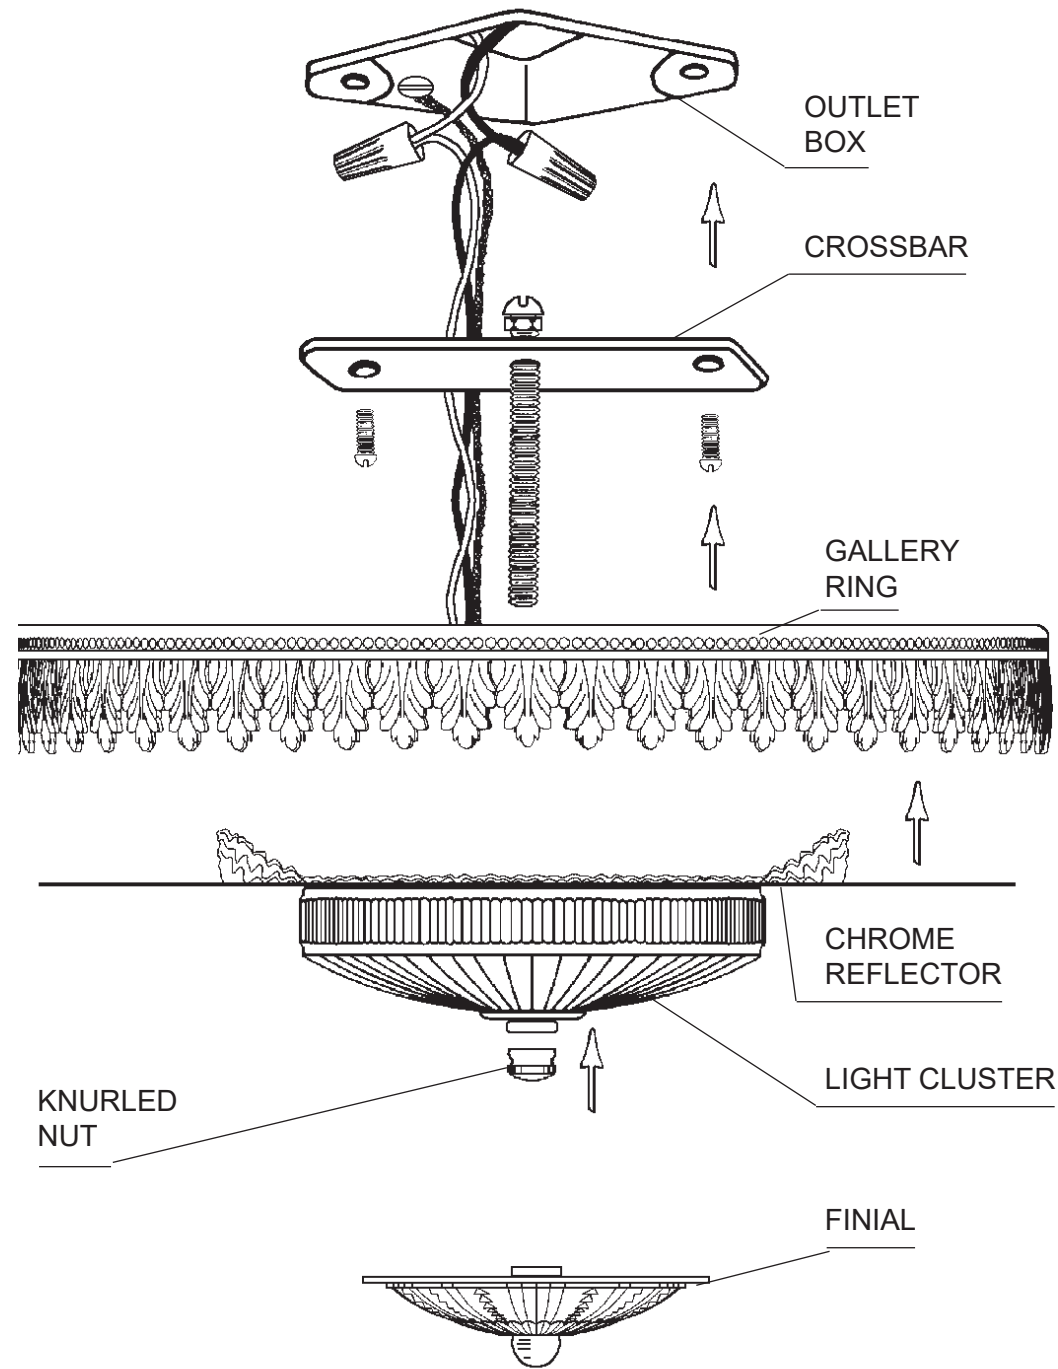



**1** Remove crossbar from light cluster and reflector. Attach to outlet box in ceiling.

**2** Place gallery ring over chrome reflector and light cluster. Connect fixture ground wire to grounding screw in outlet box and complete connections of fixture conductors to main power leads. Fixture MUST be grounded.

**3** Slide assembled parts - gallery ring together with chrome reflector (insulation pad above) and light cluster over thread attached to crossbar and secure with knurled nut. Make sure entire assembly is firmly against the ceiling. If the outlet box is not flush with ceiling, it may be necessary to adjust the thread attached to crossbar. Install bulbs and test power to insure proper wiring before hanging trim from fixture.

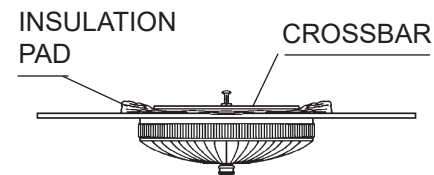






4

You will need 5 - G16-1/2  
25 Watts Recommended  
40 Watts Max  
MIN 90°C SUPPLY  
CONDUCTORS

Install bulbs and be sure  
to test fixture BEFORE  
trimming.

GALLERY  
RING

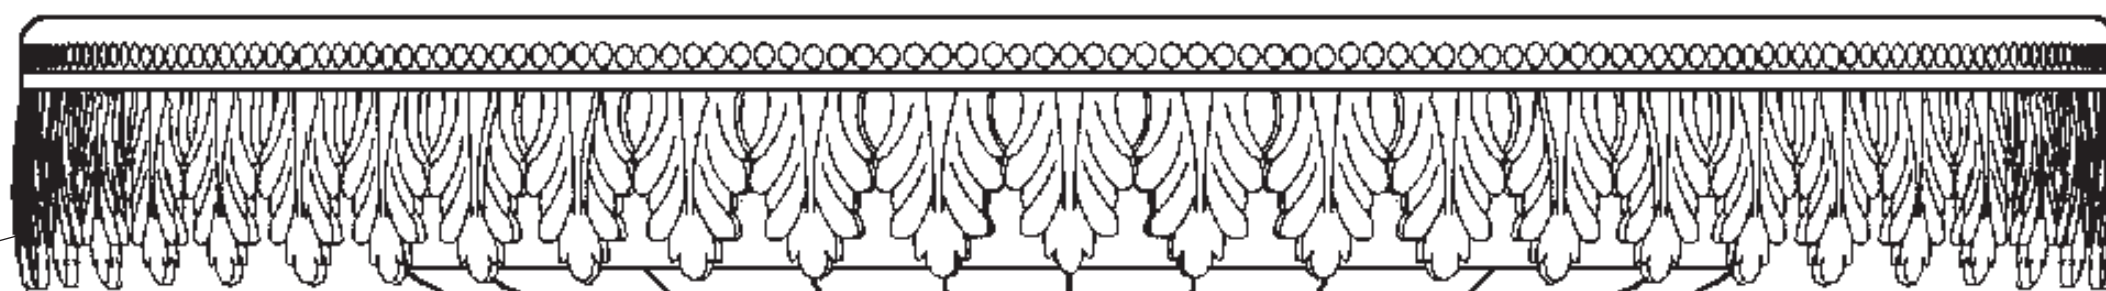


LARGE JEWEL  
UPPER END

**5** Hang all Crystal Chains "A" from every other hole in the gallery ring so that the metal accessories face outwards and so that the large jewels are on the upper end. Hook other end with small jewels into finial.

A

5

SMALL JEWEL  
LOWER END

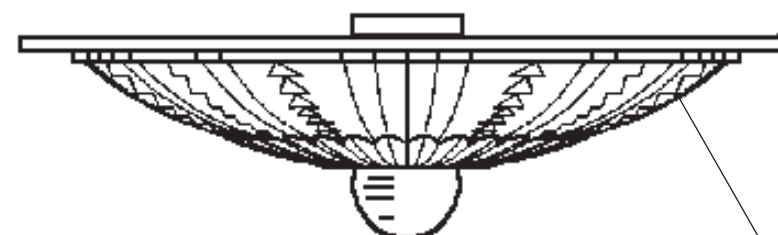

FINIAL

