

 **SCHONBEK** | 1870











# HAMILTON 5702CL




**T**HIS DESIGN IS THE PROPRIETARY TRADE DRESS/TRADEMARK OF W SCHONBEK LLC.

2 Lights  
Diameter: 14-1/2"  
Body Length: 20"  
Extension: 6"  
Hanging Weight: 7 lbs.

 **SCHONBEK** | 1870

|   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |  |
| MAX 60 W  | 110-120 V   |  |   |   |   |   |   |   |

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

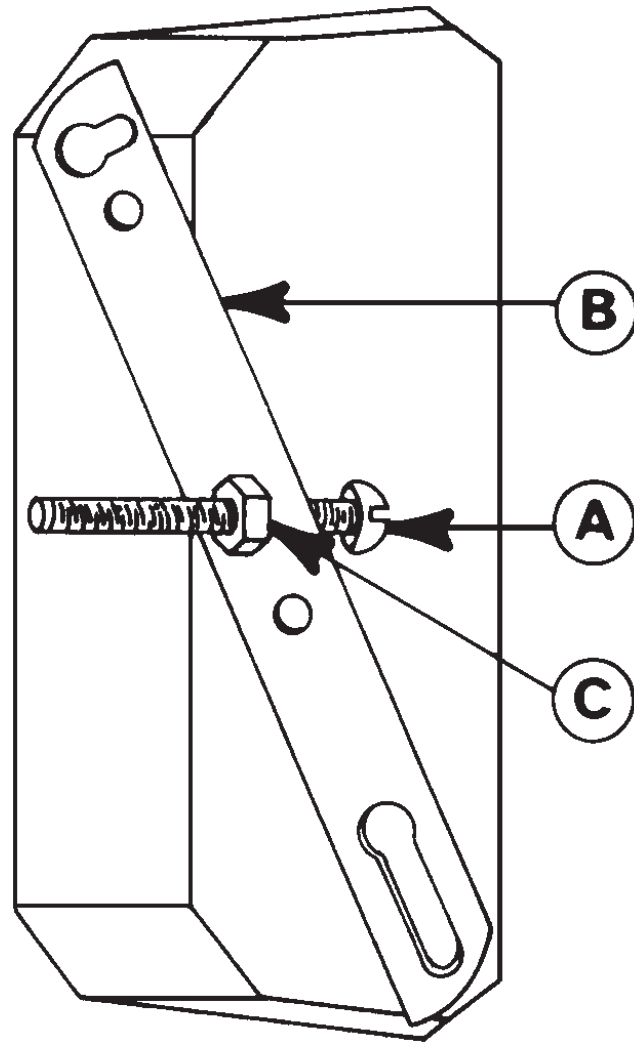


**1 MAKE SURE THAT POWER TO THE OUTLET BOX IS DISCONNECTED!!**

**2** Thread long screw "A" through crossbar "B" and attach crossbar to outlet box using 2 screws round head 8-32 x 1" (not supplied with wall bracket.)


**3** Test fit wall bracket by guiding it over screw "A". Adjust screw "A" so that it extends approximately 1/4" through wall bracket. Remove wall bracket. Thread nut "C" onto screw and tighten it against crossbar. (NOTE: In some installations, due to space, nut "C" might have to go on the other side of the crossbar.)



**4** Turn arm to line up hole in arm with dimple in plate. Tighten lock washer and nut to secure arm in place.

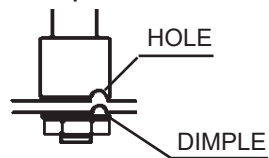

**5** Connect the wires of the wall bracket to the power wires of the outlet box, guide wall bracket over screw "A" and secure with threaded half ball supplied. NOTE: Fixture MUST be grounded.

**6** Install bobèche(s) and screw bulb(s) into all socket(s). Test power to insure proper wiring before hanging trim from fixture.



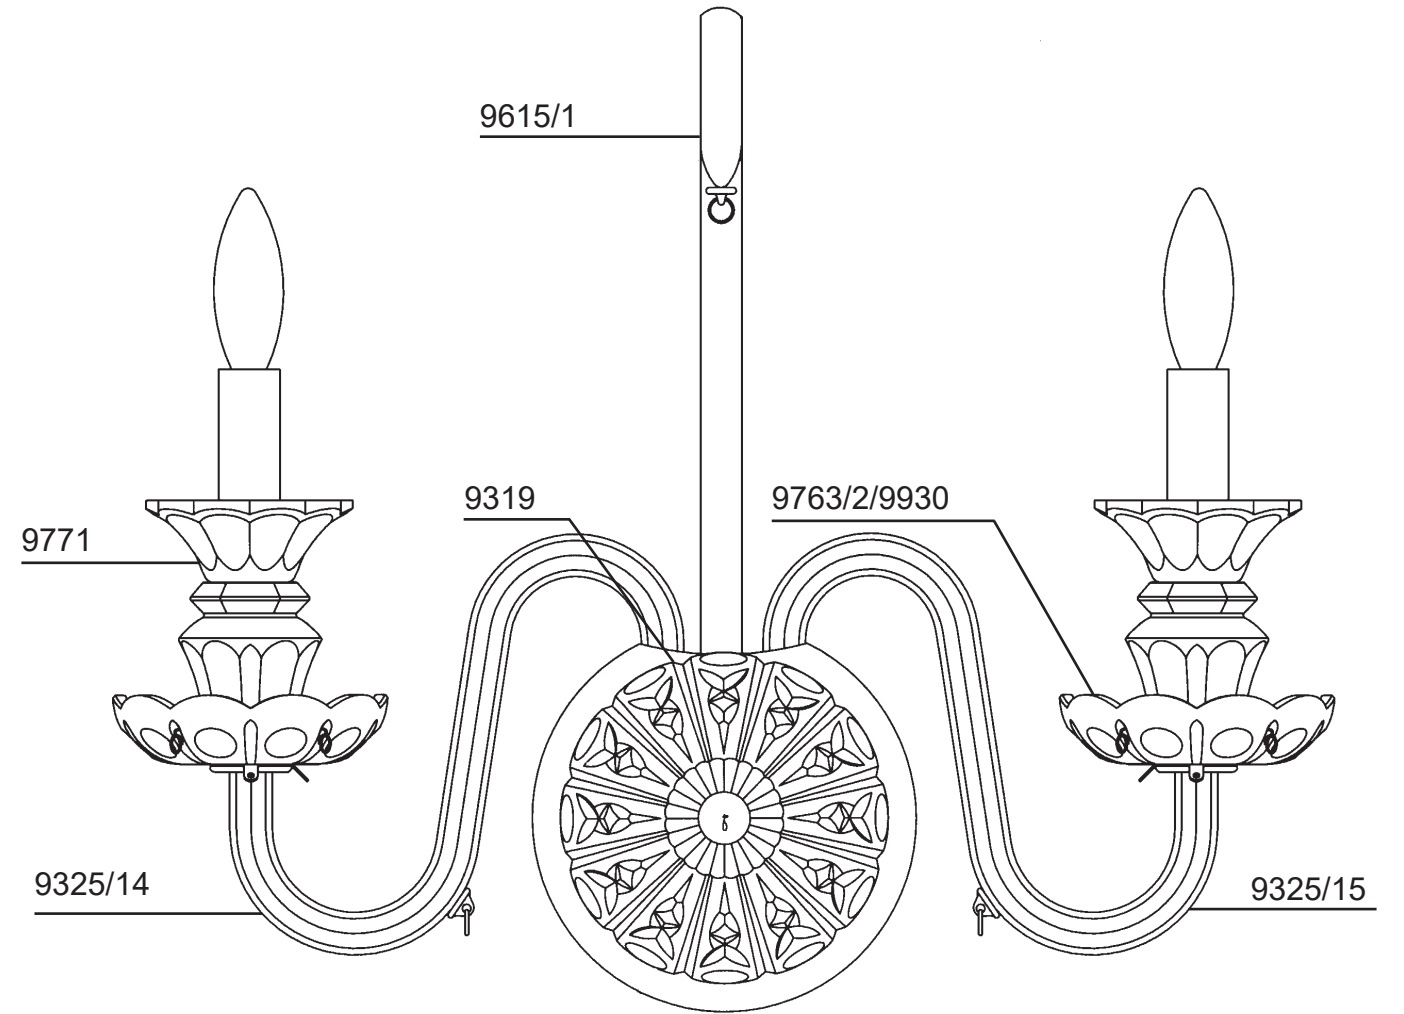



7

You will need 2 - B10  
25 Watts Recommended  
60 Watts Max

Install bulbs and be sure  
to test fixture **BEFORE**  
trimming.

